

# AE Series

## FACT SHEET

### High rejection low energy seawater RO elements

The AE series of proprietary thin film reverse osmosis elements are characterized by an excellent sodium chloride rejection. AE series is selected when high quality permeate is demanded from seawater that is relatively high in TDS.

AE series membrane chemistry provides excellent rejection characteristics when operated at seawater operating conditions (pressures exceeding 800psi (5,516kPa)).

**Table 1: Element Specification**


Membrane	Thin-film membrane (TFM)			
Model	Average permeate flow GPD (m <sup>3</sup> /day) <sup>(1) (2)</sup>	Ave. NaCl rejection <sup>(1) (2)</sup>	Min. NaCl rejection <sup>(1) (2)</sup>	Min. Boron Rejection <sup>(2)</sup>
AE-90	1875 (7.1)	99.8%	99.5%	92.0%
AE-400, 34	9000 (34.1)	99.8%	99.5%	92.0%
AE-440	9900 (37.5)	99.8%	99.5%	92.0%

(1) Average salt rejection after 24 hours of operation. Individual flow rate may vary ±20%.


(2) Testing conditions: 32,000mg/l NaCl & 5mg/l Boron solution at 800psi (5,516kPa) operating pressure, 77°F (25°C), pH 8.0 and 10% recovery.

**Table 2: Element Properties (3)**

Model	Active area ft <sup>2</sup> (m <sup>2</sup> )	Outer wrap	Part number
AE-90	90 (8.4)	Fiberglass	3056660
AE-400, 34	400 (37.2)	Fiberglass	3056662
AE-440	440 (40.9)	Fiberglass	3056663

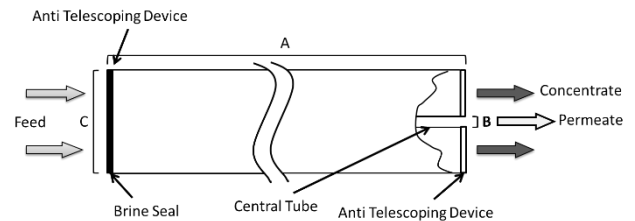

**Figure 1: Element Dimensions Diagram – Female**

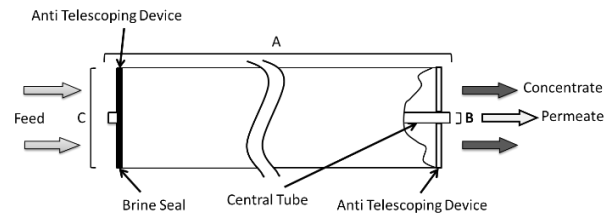

**Figure 2: Element Dimensions Diagram – Male**

**Table 3: Dimensions and Weights (3)**

Model	Type	Dimensions, inches (cm)			Boxed Weight lbs (kg)
		A	B	C	
AE-90	Male	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	9 (4)
AE-400, 34	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AE-440	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)

**Table 4: Operating and CIP Parameters (3)**

<b>Typical Operating Pressure</b>	800psi (5,516kPa)
<b>Typical Operating Flux</b>	7-11GFD (12-19LMH)
<b>Maximum Operating Pressure</b>	1,200psi (8,274kPa)
<b>Maximum Temperature</b>	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
<b>pH range</b>	Optimum rejection pH: 7.0-7.5, Continuous operation: 2.0-11.0, Clean-In-Place (CIP): 1.0 – 12.0 (4)
<b>Maximum Pressure Drop</b>	Over an element: 15 psi (103 kPa) Per housing: 50 psi (345 kPa)
<b>Chlorine Tolerance</b>	1,000+ ppm-hours, dechlorination recommended
<b>Feedwater</b>	NTU < 1 SDI <sub>15</sub> < 5

(3) Element properties and parameters are indicative numbers. Specific values by element may vary within normal element manufacturing tolerances.

(4) Refer to Cleaning Guidelines Technical Bulletin TB1194.