


Water Technologies & Solutions fact sheet

ZeeWeed* 500S, 1M

single module cassette

product specifications

Description	Specification
Part Numbers	3149069 module with air skirt, o-ring, hardware; 3152499 header plate; 3150778 ZB500S Aerator Pipe
Nominal membrane surface area	27.9 m² (300 ft²)
Max shipping weight ¹	34 kg (75 lb)
Lifting weight ²	62 kg (137 lb)
Membrane material	PVDF
Nominal pore size	0.04 micron
Nominal fiber diameter	OD: 1.9 mm (0.07 in) ID: 0.8 mm (0.03 in)
Flow path	Outside-in
Surface properties	Non-ionic & Hydrophilic

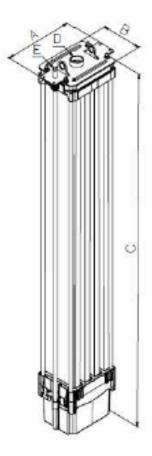

cassette dimensions & connections

Depth (A)	Width (B)	Height (C)	Permeate (D)	Aeration (E)
355 mm (14 in)	217 mm (8.5 in)	1838.8 mm (72.4 in)	1 ½ in FNPT	1/2 in MNPT

operating parameters

Davamatar	Description	Specification		
Parameter	Description	MBR	Drinking Water	
Aeration	Instantaneous Air Flow	13.6 dm3/hr (8 dcfm)	1.0 scfm	
Operating conditions	TMP range	-55 to 55 kPa(-8 to 8 psi)	-90 to 90 kPa(-13 to 13 psi)	
	Max temperature	40°C (104°F)		
	Operating pH	5.0 to 9.5		
Cleaning	Cleaning pH range (<30°C)	2.0 to 10.5 (max pH 10 from 30 to 40°C)		
	Max chlorine concentration	250 ppm		

 $Find a \ contact \ near \ you \ by \ visiting \ \underline{www.suezwatertechnologies.com} \ and \ clicking \ on \ "Contact \ Us."$

¹Packaged; ² Varies with solids accumulation

^{*}Trademark of SUEZ; may be registered in one or more countries. ©2018 SUEZ. All rights reserved.